



# LONG FIBER TECHNOLOGIES

**Complēt™**  
Long Fiber Reinforced  
Structural Thermoplastics

**OnForce™**  
Long Glass Fiber Reinforced  
Polypropylene Composites

 **AVIENT™**

# BE STRONGER, GET TOUGHER, GO LIGHTER

Optimize stiffness, strength, and toughness to obtain structural performance with lightweight long fiber reinforced thermoplastics.

Long fiber reinforced thermoplastics provide structural performance that can go head-to-head with metals at a fraction of their weight while retaining the processing ease of injection molding.

Complēt™ long fiber reinforced structural thermoplastics and OnForce™ long glass fiber reinforced polypropylene composites utilize carbon, glass, or specialty fibers in a broad range of thermoplastic polymers to optimize material performance to your application requirements.



Pyrolysis removes the matrix polymer of injection-molded specimens to reveal the different internal fiber structure of long glass fiber and short glass fiber parts.

Entanglement of longer fiber filaments allows the long fiber part to retain its molded form, which provides more structural integrity and increased toughness.



Long glass fiber

Injection molded part

Short glass fiber

# CAPABILITIES TO BUILD BETTER

Long fiber reinforced composite materials incorporate longer filaments of fiber reinforcement to increase mechanical properties and structural capabilities to higher levels than short fiber formulations.

Higher aspect ratio fiber filaments in long fiber composites increase material stiffness and strength, while also boosting toughness.


During injection molding, longer fibers align and intertwine to form an internal skeletal network, enabling a unique set of performance characteristics, including:

- High strength-to-weight ratio which facilitates metal replacement to achieve weight reduction
- Added stiffness and strength to carry loads while resisting creep deformation
- Increased toughness to absorb impact forces without permanent damage
- High cyclical fatigue endurance to resist cracking and crack propagation
- Mechanical performance that is retained across a wide temperature range
- Improved dimensional stability with nearly isotropic properties and low thermal expansion
- Corrosion and chemical resistance



Long fiber composites provide a combination of stiffness, strength, and toughness performance enhancements not available together when using other reinforcing methods, while retaining the single-step processing simplicity of injection molding.

## Qualitative Influence of Fiber Length

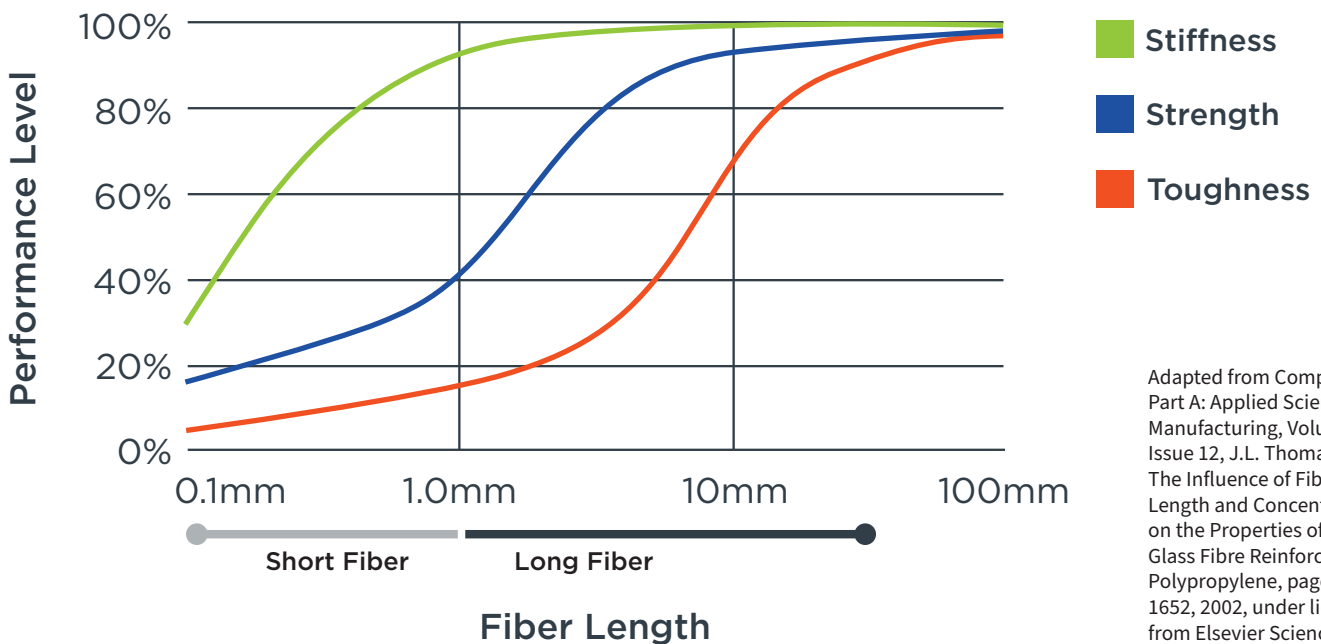


Adapted from Composites Part A: Applied Science and Manufacturing, Volume 33, Issue 12, J.L. Thomason, The Influence of Fibre Length and Concentration on the Properties of Glass Fibre Reinforced Polypropylene, pages 1641-1652, 2002, under license from Elsevier Science Ltd.

# DELIVERING SUSTAINABILITY THROUGH LIGHTWEIGHTING

Long fiber reinforced polymers have a high strength-to-weight ratio, which provides structural performance at a fraction of the weight of metals. As a result, these long fiber materials can accelerate lightweighting initiatives across a broad range of industries, including automotive, aerospace, sporting goods, and any applications requiring portability.

With appropriate material selection and part design optimization, long carbon fiber materials can reduce the weight of components up to 50% compared to aluminum.

## DESIGN & DEPLOY WITH CONFIDENCE

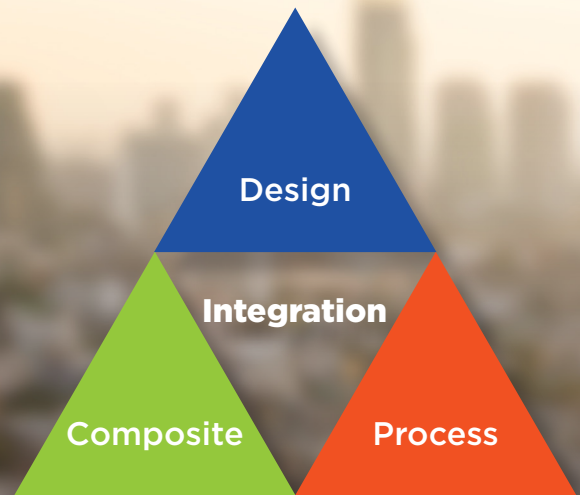

Transitioning from traditional materials to long fiber composites requires an integrated approach that includes material formulation, component design, and forming process. This is the best way to maximize long fiber performance and get the most benefit from material change. Our experts can help you make the transition, from concept to commercialization.

- **Customized Solutions** – Formulations tailored to meet specific performance targets utilizing a wide range of polymer resins and fiber reinforcement combinations including polypropylene, various nylon (polyamide) formulations, and engineered thermoplastic polyurethane resins combined with carbon and/or glass fibers, as well as functional performance enhancing additives.
- **Improve Design Freedom/Reduce Material Substitution Risk** – We're experts at helping you with structural design and manufacturability, along with detailed performance analysis using finite element, fiber orientation, and mold filling CAE tools.

# AVIENT LONG FIBER TECHNOLOGIES

Avient has built a robust portfolio of long fiber formulations in a wide range of thermoplastic resins to meet your structural design and performance specifications. We combine these technologies with an array of functional additives to make your products perform better.

## **Complēt™ LGF**

Long glass fiber reinforced engineering resins with enhanced mechanical properties that allow for metal replacement.

## **Complēt™ LCF**

Long carbon fiber reinforced materials have higher rigidity/modulus, higher strength, lighter weight, and more marketability potential than glass fiber, making it the ideal fiber reinforcement for metal replacement.

## **Complēt™ Hybrid**

Synergistically combines long carbon and long glass fiber together in a unified pellet solution to optimize performance and cost while enabling a more consistent molding experience and end product compared to blending at the press.

## **Complēt™ MT**

Maximum toughness, long fiber reinforced nylons (polyamides) formulated for extra impact and fatigue resistance.

## **Complēt™ Moisture Resistant**

Long fiber reinforced nylon 6 or 66 thermoplastics formulated for more consistent performance in moisture-rich conditions.

## **Complēt™ PKE**

Long glass fiber reinforced polyketone solutions that deliver excellent chemical resistance, low moisture uptake, and a reduced carbon footprint.

## **Complēt™ REC**

Long fiber solutions incorporating recycled content. Available with post-consumer recycled (PCR) nylon 6, and post-industrial recycled (PIR) nylon 66 and TPU.

## **OnForce™ LGF/PP**

Long glass fiber reinforced polypropylene widely used in higher volume applications.



# OVERCOME MATERIAL CHALLENGES

## Deploy long fiber reinforced composites to meet these needs:

- Metal replacement for weight reduction
- Failure of lower performing plastics
- Structural load carrying requirements
- Increased impact or fatigue durability
- Wide temperature range performance
- Thermoplastic design freedom
- Manufacturing process cost savings

**1.844.4AVIENT**  
**www.avient.com**



Copyright © 2024, Avient Corporation. Avient makes no representations, guarantees, or warranties of any kind with respect to the information contained in this document about its accuracy, suitability for particular applications, or the results obtained or obtainable using the information. Some of the information arises from laboratory work with small-scale equipment which may not provide a reliable indication of performance or properties obtained or obtainable on larger-scale equipment. Values reported as "typical" or stated without a range do not state minimum or maximum properties; consult your sales representative for property ranges and min/max specifications. Processing conditions can cause material properties to shift from the values stated in the information. Avient makes no warranties or guarantees respecting suitability of either Avient's products or the information for your process or end-use application. You have the responsibility to conduct full-scale end-product performance testing to determine suitability in your application, and you assume all risk and liability arising from your use of the information and/or use or handling of any product. AVIENT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, either with respect to the information or products reflected by the information. This literature shall NOT operate as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner.